


HOME SOURCE

Forma -- Dressing table with Mirror and stool

Assembly Instructions – Please keep for future reference

DRSFORWHT

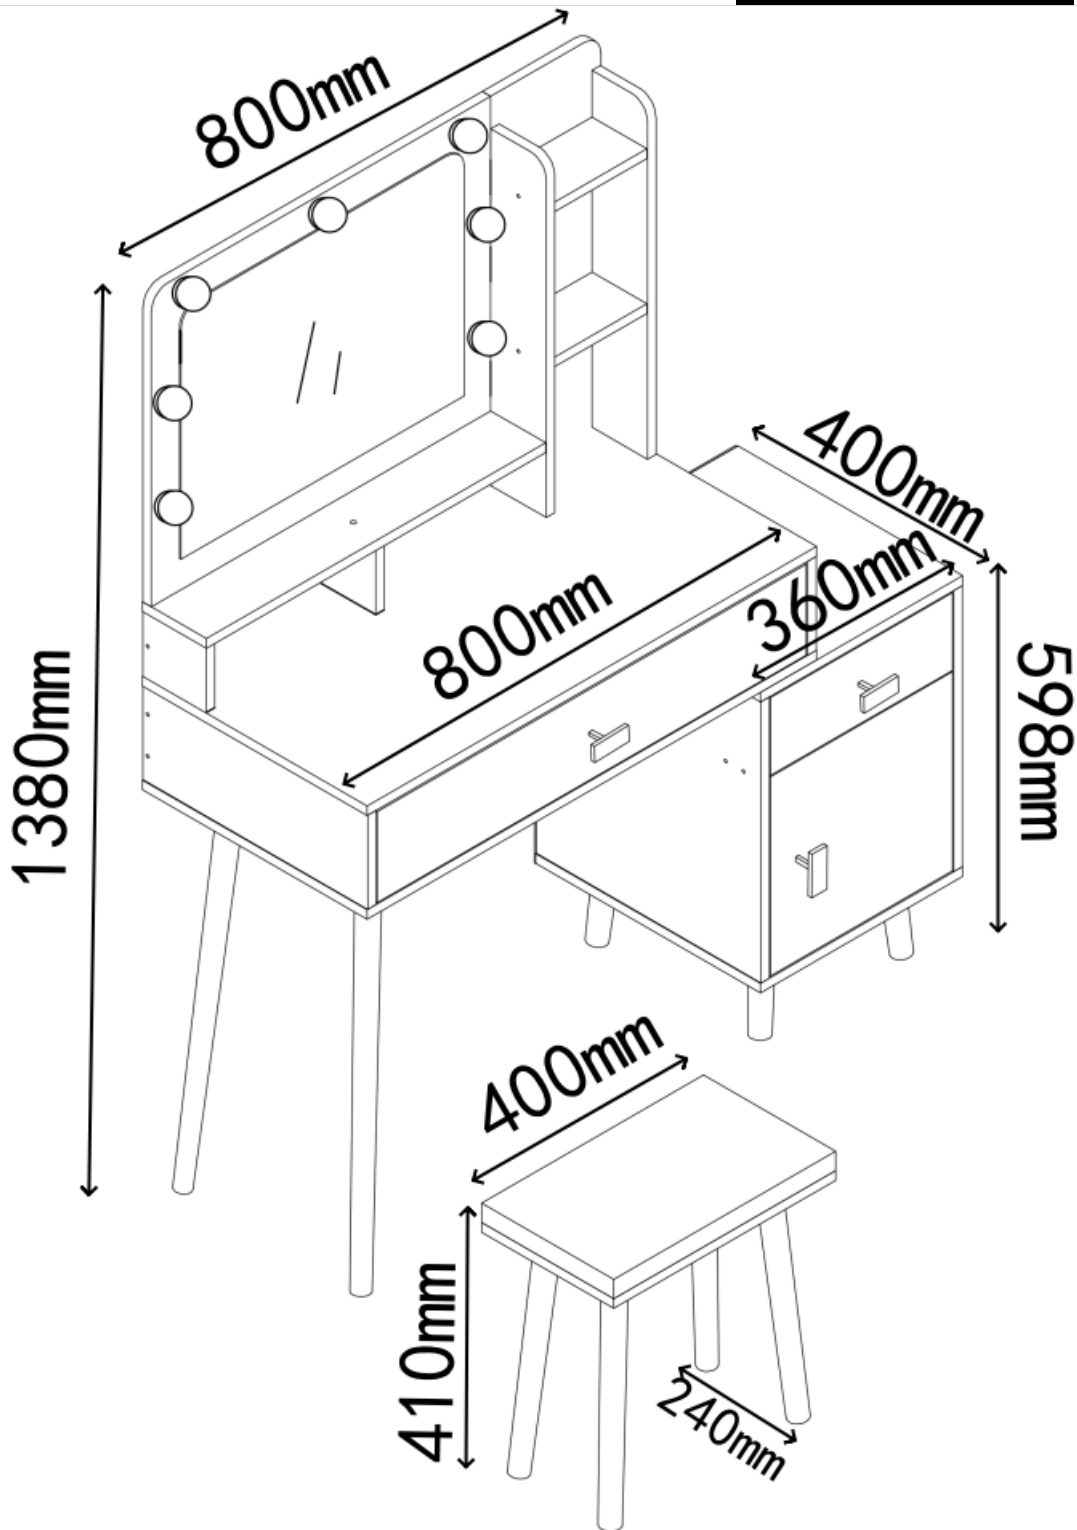

Dimensions	No. people	Assembly Time	OW #
Width: 106cm Depth: 40cm Height: 138cm		60 mins (approx.)	DRSFORWHT



Important

- PLEASE READ THESE INSTRUCTIONS FULLY BEFORE STARTING ASSEMBLY
- PLEASE DO NOT THROW THE PACKAGING AWAY UNTIL YOU ARE SATISFIED WITH PURCHASE, GOODS NEED TO BE RETURNED IN ORIGINAL PACKAGING.

If you need help or have damaged or missing parts, please email support@home-source.co.uk

Safety and Care Advice

Important

- PLEASE READ THESE INSTRUCTIONS FULLY BEFORE STARTING ASSEMBLY
- PLEASE DO NOT THROW THE PACKAGING AWAY UNTIL YOU ARE SATISFIED WITH PURCHASE, GOODS NEED TO BE RETURNED IN ORIGINAL PACKAGING.

- Check you have all the components and tools listed on pages 4 and 5.
- Remove all fittings from the plastic bags and separate
- Make sure you have enough space to lay out the parts before starting.
- Do not stand or put weight on the product, this could cause
- Assemble on a soft, level surface to avoid damaging the unit or your floor.
- We do not recommend the use of power drill/drivers for



Warnings

CHILD SAFETY



ANCHOR AND PROTECT A CHILD

Use of anti-tip kit is required

- Place heaviest items in the lowest drawers.
- Useless specifically designed to accommodate, do not set TVs or other heavy objects on top of this product.
- Never allow children to climb or hang on drawers, doors or shelves.
- Never open more than one drawer at a time.
- Do not defeat or remove the drawer interlock system.
- Use of tip-over restraints may only reduce, but not eliminate, the risk of tip-over.

CLIMBING MAY RESULT IN SERIOUS INJURY

- them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- damage.
- Assemble the item as close to its final position (in the same room) as possible.
- inserting screws, as this could damage the unit. Only use hand screwdrivers.
- Dispose of all packaging carefully and responsibly.

Care and Maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.


If kept outside please ensure in the winter months that the product is correctly covered or put away into a dry environment to prevent corrosion, weathering or damage.

If your product is not designed to be outside, we recommend that it is always kept indoors in a dry environment.

**If you are unhappy with the product and wish to return it,
please follow the retailer's returns procedure.**

Exploded View

If you have damaged or missing components,
email: support@home-source.co.uk

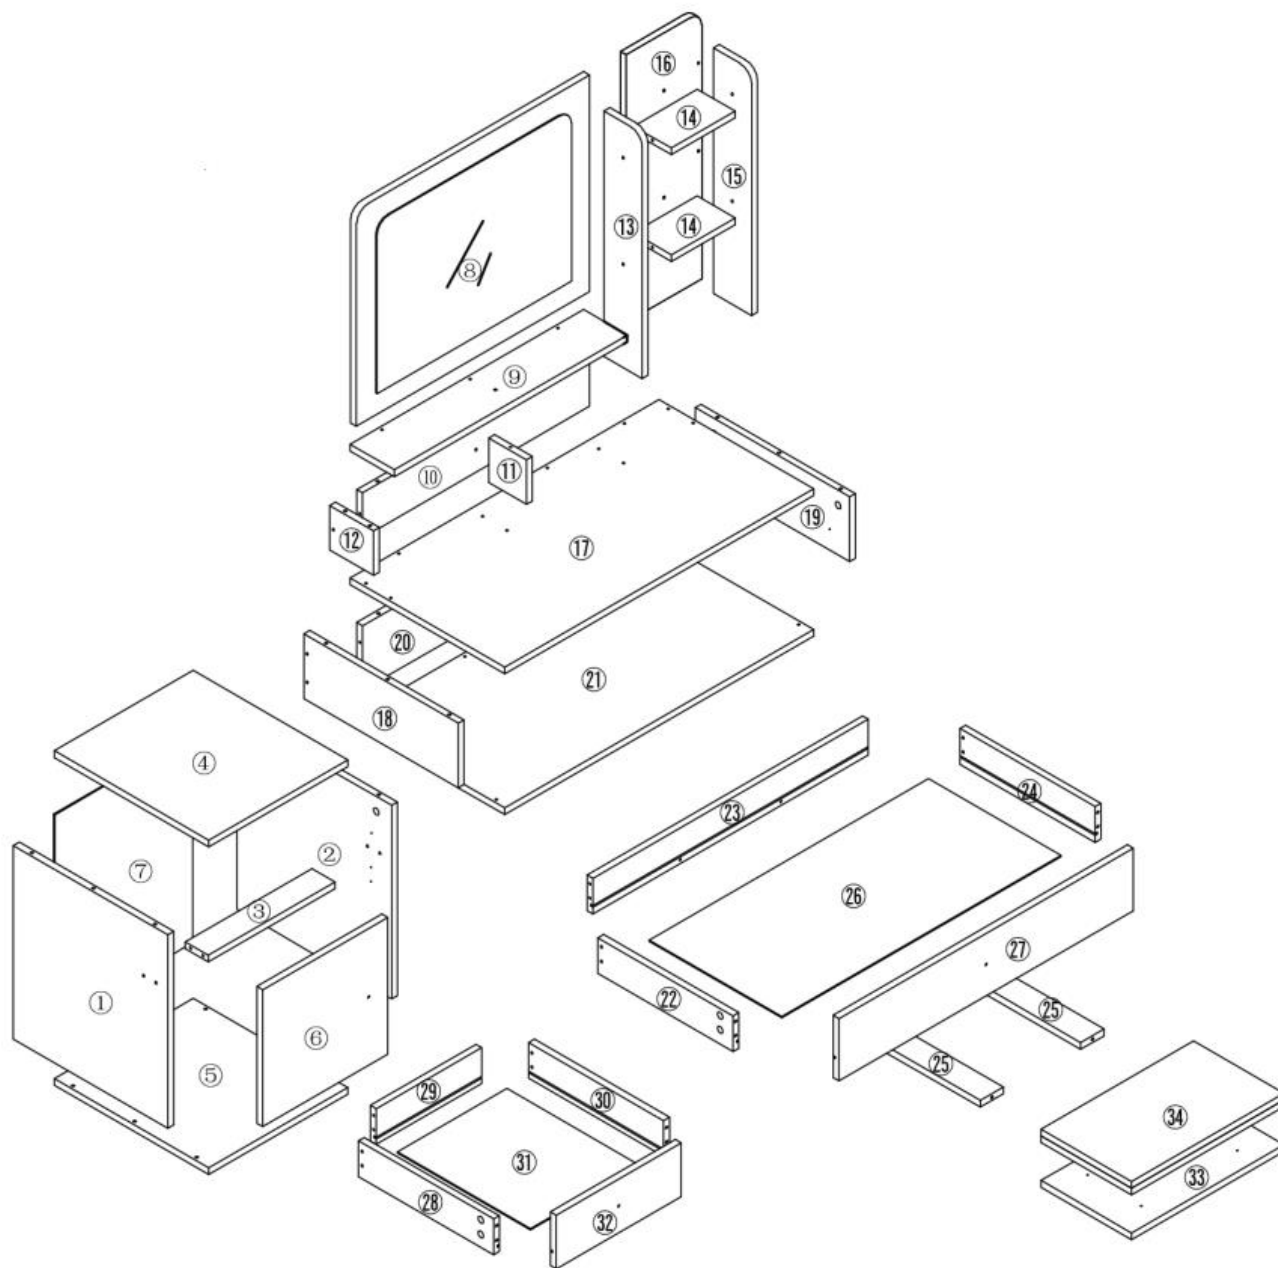

Components - Panels

If you have damaged or missing components,
email: support@home-source.co.uk

Please check that you have all the components listed below before constructing your item.

Part No	Description	Qty	Size (mm)	Thickness (mm)
1	LEFT SIDE PANEL	1	433.5*400	15
2	RIGHT SIDE PANEL	1	433.5*400	15
3	CONNECTOR PANEL	1	328*60	15
4	TOP PANEL	1	360*400	15
5	BOTTOM PANEL	1	360*400	15
6	DOOR	1	307*324	15
7	BACK PANEL	1	463.5*358	3
8	MIRROR PANEL	1	604*485	15
9	UPPER CROSS SHELF	1	604*114	15
10	BACK PANEL	1	588*100	15
11	SMALL MIDDLE PARTITION PANEL	1	100*97	15
12	BIGGER PARTITION PANEL	1	100*113	15
13	UPPER LEFT SIDE PANEL	1	550*99	15
14	UPPER SHELF PANEL	2	165*98	15
15	UPPER RIGHT SIDE PANEL	1	550*99	15
16	UPPER BACK PANEL	1	196*600	15
17	TABLE TOP PANEL	1	800*400	15
18	TABLE LEFT SIDE PANEL	1	145*400	15
19	TABLE RIGHT SIDE PANEL	1	145*400	15
20	TABLE BACK PANEL	1	768*145	15
21	TABLE BOTTOM PANEL	1	800*400	15
22	BIG DRAWER LEFT SIDE PANEL	1	350*80	15
23	BIG DRAWER STOPPER	1	713*80	15
24	BIG DRAWER RIGHT SIDE PANEL	1	350*80	15
25	BIG DRAWER SUPPORTOR	2	334*60	15
26	BIG DRAWER BOTTOM PANEL	1	723*344	3
27	BIG DRAWER FACE	1	763*140	15
28	SMALL DRAWER LEFT SIDE PANEL	1	350*80	15
29	SMALL DRAWER STOPPER	1	273*80	15
30	SMALL DRAWER RIGHT SIDE PANEL	1	350*80	15

31	SMALL DRAWER BOTTOM PANEL	1	283*344	3
32	SMALL DRAWER FACE	1	324*120	15
33	STOOL TOP PANEL	1	395*235	15
34	STOOL CUSHION	1	400*240	32

Important – Please read these instructions fully before starting assembly





If you need help or have damaged or missing parts, please email support@home-source.co.uk

Components - Fixings

If you have damaged or missing components,
email: support@home-source.co.uk

Please check that you have all the components listed below before constructing your item.


Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

(A)	 28 PCS	(B)	8*40  11 PCS	(C)	5*40  55 PCS	(D1)	350mm  2 SETS
(D2)	350mm  2 SETS	(E)	3.5*14  86 PCS	(F)	67*67mm  10 PCS	(G)	120mm  4 PCS
(H)	600mm  2 PCS	(I)	22*4  3 PCS	(J)	2*12  5 PCS	(K)	 2PCS
(L)	25*3.5  4 PCS	(M)	 30 PCS	(N1)	 2 PCS	(N2)	3.5*35  2 PCS
(N3)	3.5*14  2 PCS	(N4)	35*6  2 PCS	(O)	Φ 13  21 PCS	(P)	360mm  4 PCS
(Q)	 1 PC	(R)	 1 PC	(S)	 1 PC		

Tools Required



Ruler – Use this to measure your screws (mm)



Important – Please read these instructions fully before starting assembly

Assembly Instructions

If you have damaged or missing components,
email: support@home-source.co.uk

STEP 1


Attach Slide Runner

Screw 4pcs Short Tapping Screw E into Panel ① and Panel ② with 2pcs Slide Runner D1.



NOTE

Please ensure that screw holes are drilled correctly and keep the screws on the slide runners are flat.

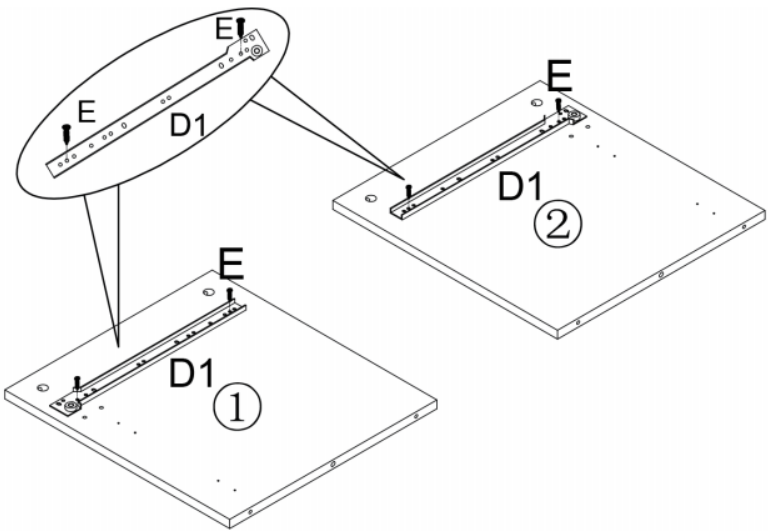


D1*2 E*4

Panel Required	Qty
①	1
②	1

STEP 2

Assemble Side Panels of Cabinet

- Insert 4pcs Hexagon Tapping Screw C to connect Panel ③ to Panel ① and Panel ② (Side Part installed in STEP 1).
- Place 4pcs Big Sticker O to cover Hexagon Tapping Screw C.

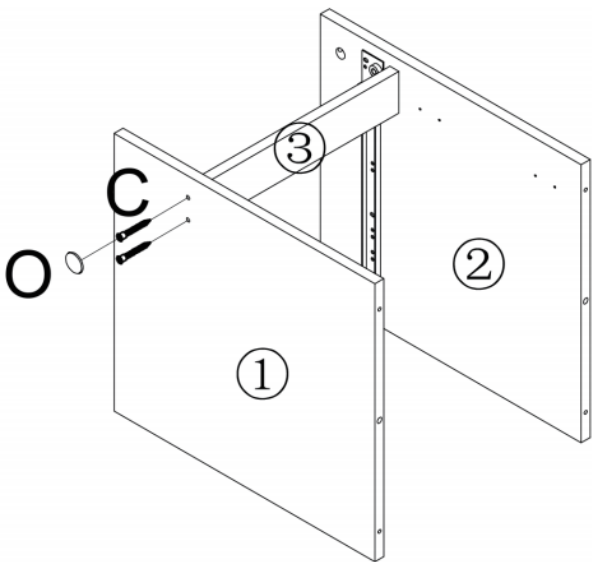

C*4 O*4

Panel Required	Qty
①	1
②	1
③	1

STEP 3

Fit Top Panel of Cabinet


- Screw 4pcs Cambolt A to Panel ④ and insert 2pcs Wooden Dowel B to middle hole of Panel ④ to connect Panel ① and Panel ② (Side Part installed in STEP 3).

- Tighten 4pcs Camlock A.







NOTE

Don't screw too deep

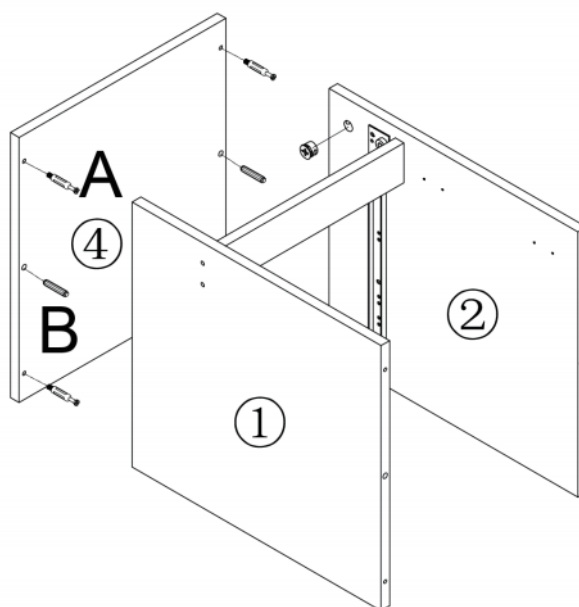

A*4

B*2




Panel Required	Qty
①	1
②	1
④	1

STEP 4

Fit Bottom Panel of Cabinet

- Insert 2pcs Wooden Dowel B to middle hole of Panel ① and Panel ②.
- Insert 4pcs Hexagon Tapping Screw C to Panel ⑤ to connect Panel ① and Panel ② (Side Part installed in STEP 4).

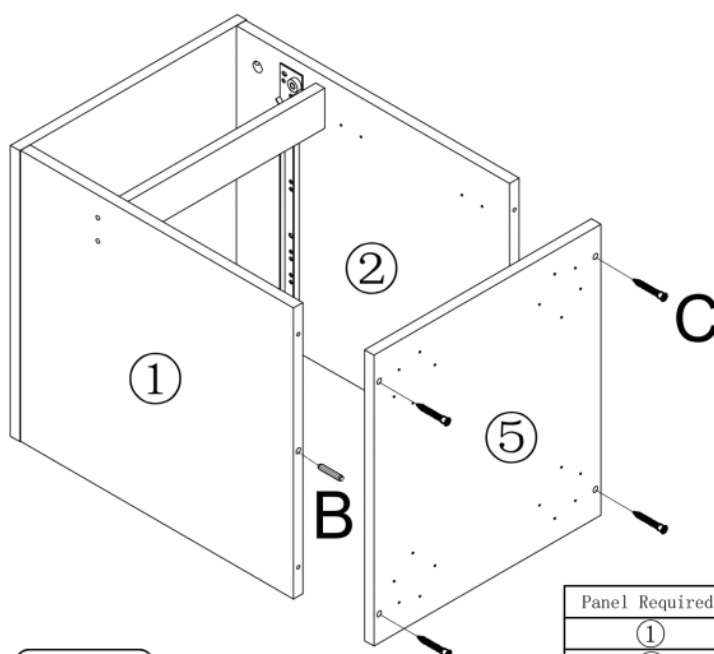

C*4


B*2

Panel Required	Qty
①	1
②	1
⑤	1

STEP 5

Assemble Side Cabinet Legs

Insert 20pcs Short Tapping Screw E through 4pcs Mounting Plate F to assemble 4pcs Side Cabinet Legs G to Panel ⑤ (installed in STEP 4).

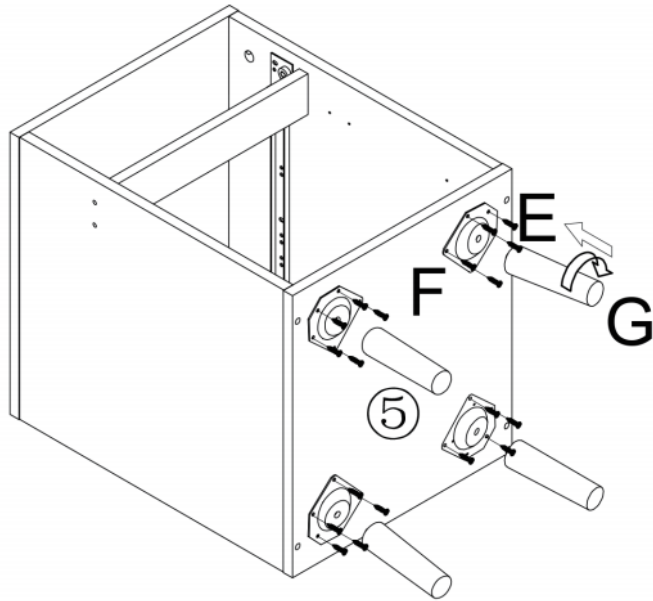

G*4

E*20


F*4

Panel Required	Qty
⑤	1

STEP 6

Assemble Hinge of Cabinet Door

Insert 4pcs Short Tapping Screw E through 2pcs Hinge K to Panel ⑥.

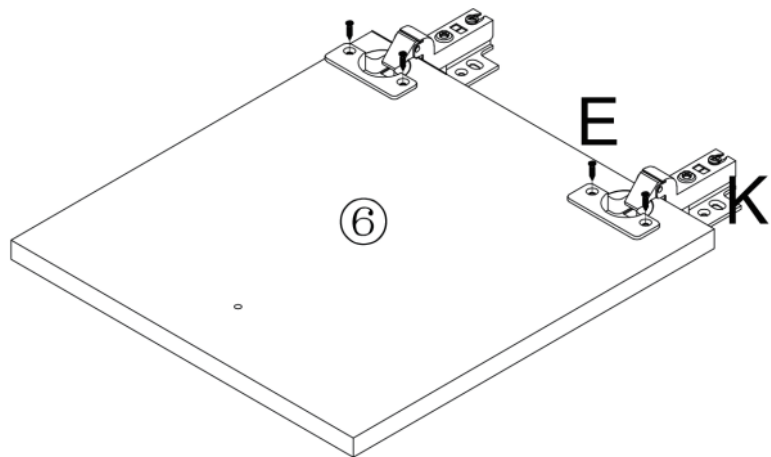

E*4


K*2

Panel Required	Qty
⑥	1

STEP 7

Assemble Mirror

Insert 3pcs Hexagon Tapping Screw C to connect Panel ⑧ and Panel ⑨.

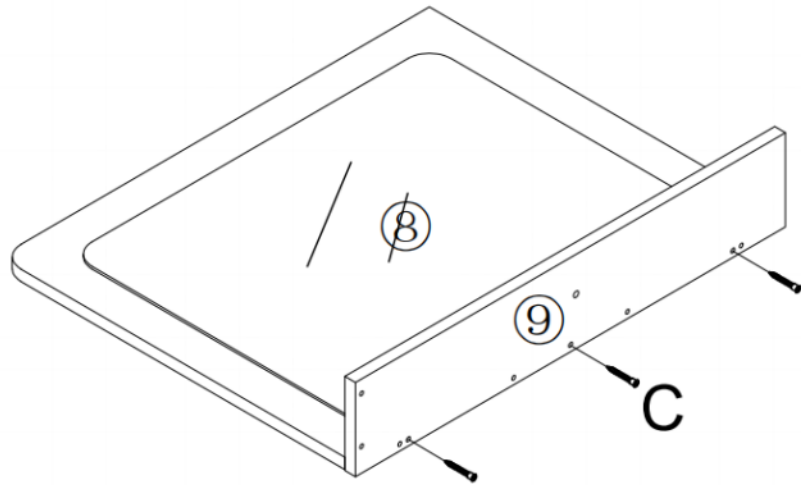


C*3

Panel Required	Qty
⑧	1
⑨	1

STEP 8

Assemble Shelf

- Insert 1pcs Hexagon Tapping Screw C to connect Panel ⑩ and Panel ⑪.
- Place 1pc Big Sticker O to cover Hexagon Tapping Screw C.

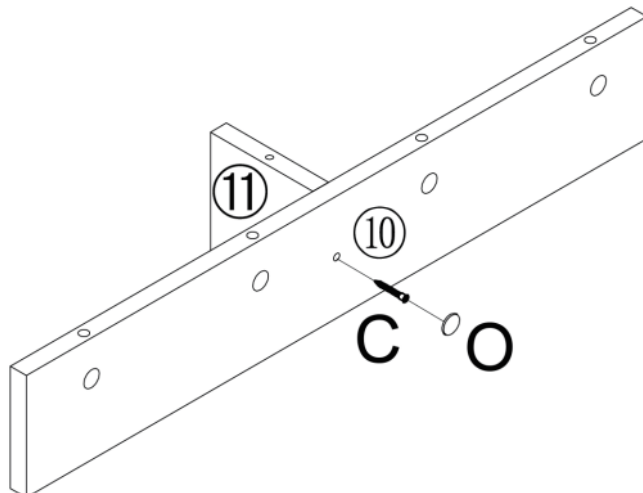

C*1


O*1

Panel Required	Qty
⑩	1
⑪	1

STEP 9

Assemble Shelf

- Insert 1pcs Hexagon Tapping Screw C to connect Panel ⑩ and Panel ⑫ (installed in STEP 8).
- Place 1pc Big Sticker O to cover Hexagon Tapping Screw C.

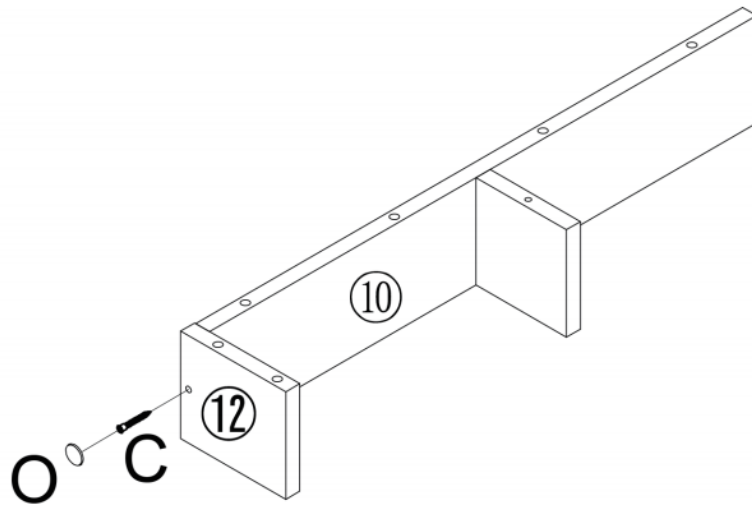

C*1

O*1

Panel Required	Qty
⑩	1
⑫	1

STEP 10


Fit Mirror Shelf

- Screw 6pcs Cambolt A to Panel ⑨ and insert 1pc Wooden Dowel B to middle hole of Panel ⑨ to connect Panel ⑩, Panel ⑪ and Panel ⑫ (installed in STEP 9).
- Tighten 6pcs Camlock A.



NOTE


Don't screw too deep

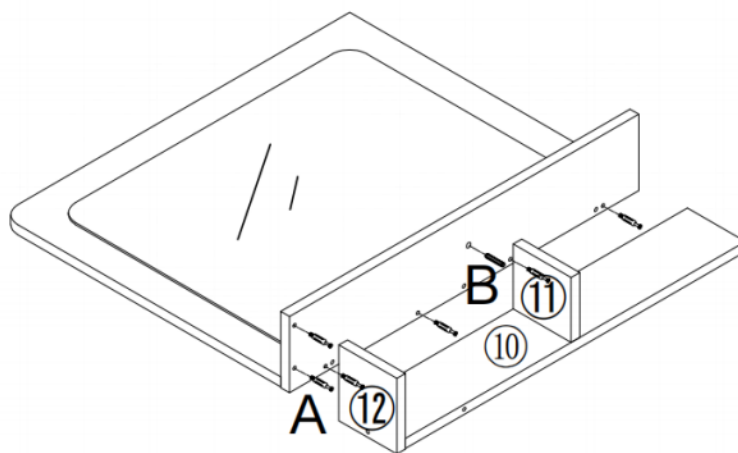

A*6

B*1


Panel Required	Qty
⑩	1
⑪	1
⑫	1

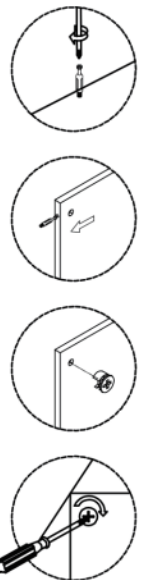

STEP 11

Assemble Side Shelf

- Insert 4pcs Hexagon Tapping Screw C to connect Panel (13), 2pcs of Panel (14) and Panel (15).
- Place 4pcs Big Sticker O to cover Hexagon Tapping Screw C.

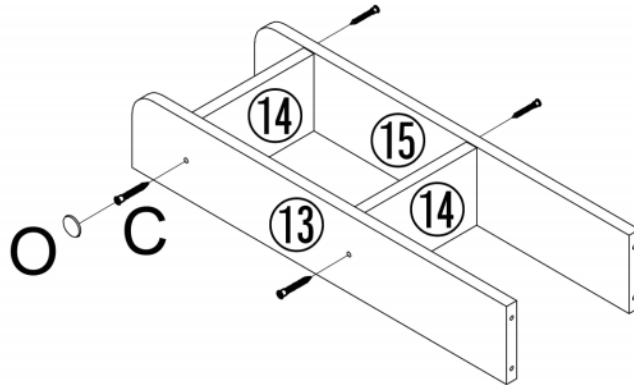


C*4 O*4

Panel Required	Qty
(13)	1
(14)	2
(15)	1

STEP 12

Assemble Back Panel of Side Shelf

- Insert 7pcs Hexagon Tapping Screw C to Panel (16) to connect Panel (13), 2pcs of Panel (14) and Panel (15) (Side Shelf Part installed in STEP 11).
- Place 7pcs Big Sticker O to cover Hexagon Tapping Screw C.

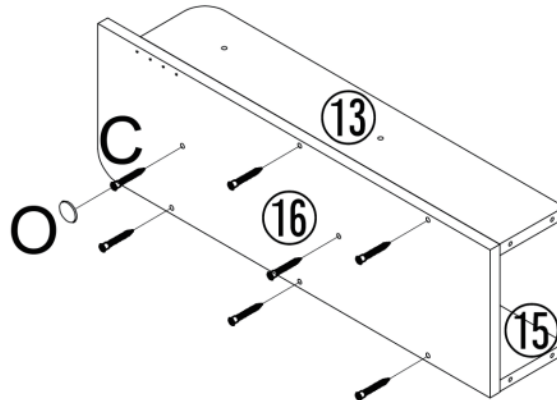


C*7 O*7

Panel Required	Qty
(13)	1
(15)	1
(16)	1

STEP 13

Assemble Back Panel of Side Shelf

Insert 11pcs Hexagon Tapping Screw C to Panel ⑰ to connect Panel ⑩, Panel ⑪, Panel ⑫, Panel ⑬, Panel ⑮ and Panel ⑯ (Top Mirror Part installed in STEP10 to STEP 12).

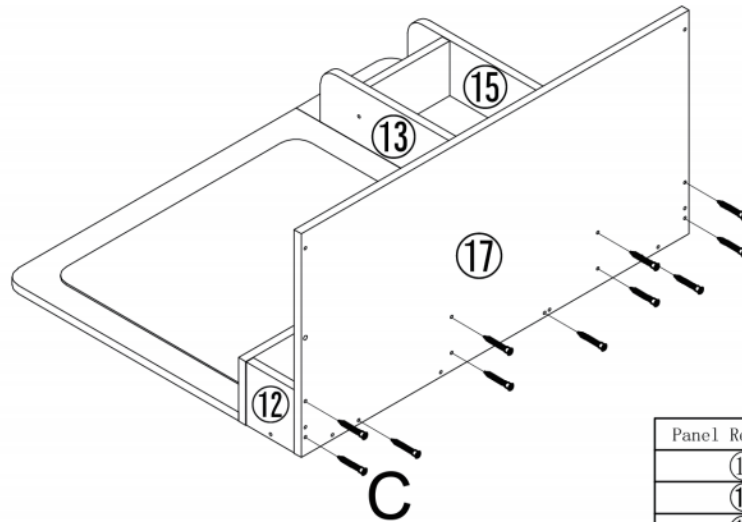


C*11

Panel Required	Qty
⑩	1
⑪	1
⑫	1
⑬	1
⑮	1
⑯	1

STEP 14

Fit Butt Hinge

Insert 8pcs Short Tapping Screw E through Butt Hinge Q to connect Panel ⑧ and Panel ⑯.

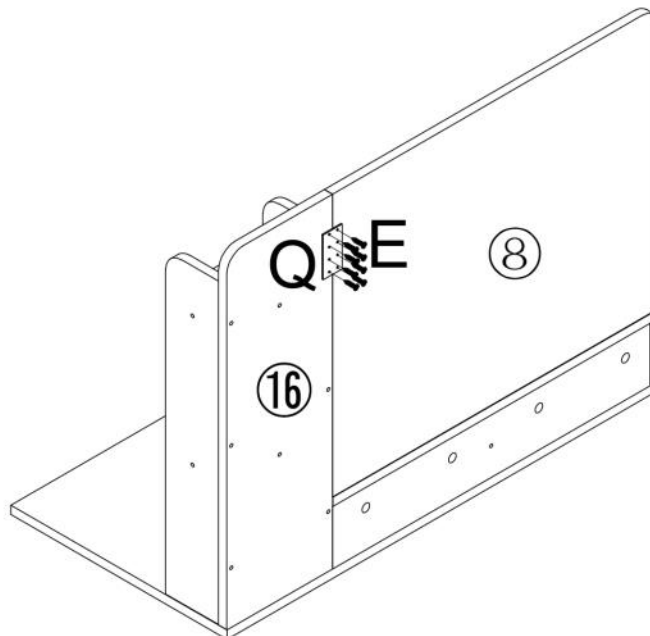

E*8

Q*1

Panel Required	Qty
⑧	1
⑯	1

STEP 15


Attach Slide Runner of Drawers

Screw 4pcs Short Tapping Screw E into Panel (18), and Panel (19) with 2pcs Slide Runner D1.



NOTE

Please ensure that screw holes are drilled correctly and keep the screws on the slide runners are flat.

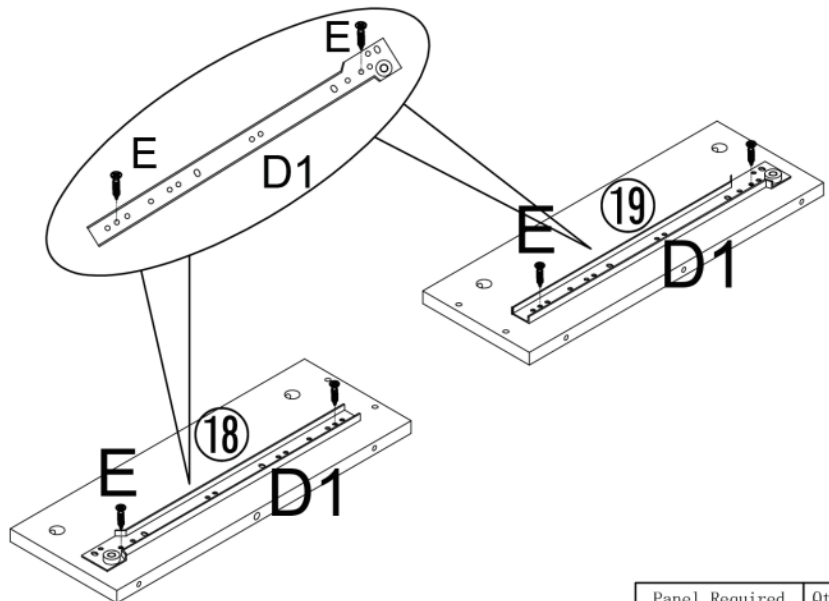

E*4


D1*2

Panel Required	Qty
(18)	1
(19)	1

STEP 16

Assemble Storage Drawer

- Insert 4pcs Hexagon Tapping Screw C to connect Panel (18), Panel (19) and Panel (20).
- Place 4pcs Big Sticker O to cover Hexagon Tapping Screw C.

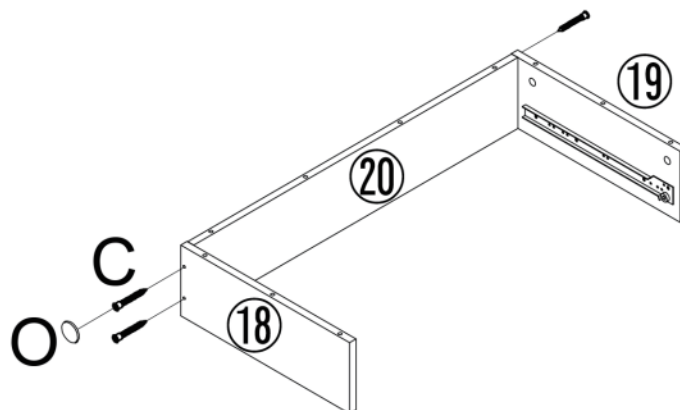

C*4


O*4

Panel Required	Qty
(18)	1
(19)	1
(20)	1

STEP 17

Assemble Bottom Panel of Storage Drawer

Insert 8pcs Hexagon Tapping Screw C and insert 2pcs Wooden Dowel B to middle hole of Panel ⑱ and Panel ⑲ to connect Panel ㉑ to Storage Drawer Part(installed in STEP 16).

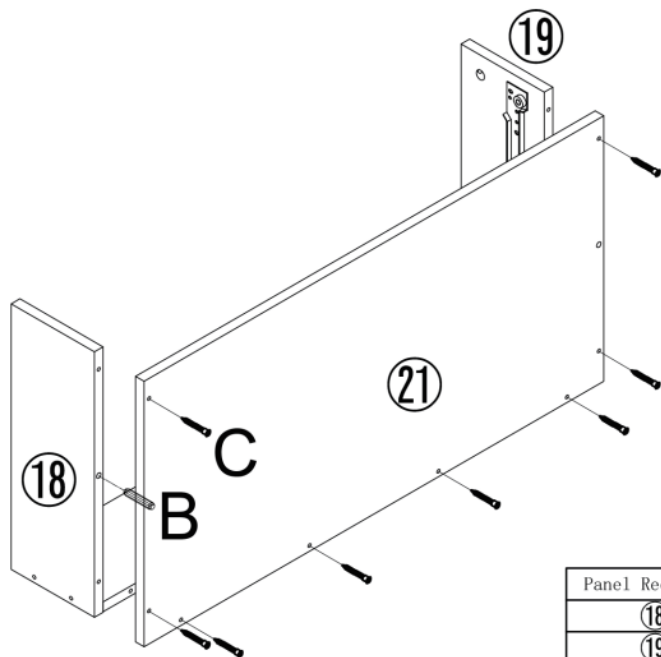

B*2

C*8

Panel Required	Qty
⑱	1
⑲	1
㉑	1
⑳	1

STEP 18


Fit Tabletop

- Screw 6pcs Cambolt A and insert 4pcs Wooden Dowel B to Panel ⑰ to connect Storage Drawer Part (installed in STEP 17).
- Tighten 6pcs Camlock A.



NOTE

Don't screw too deep

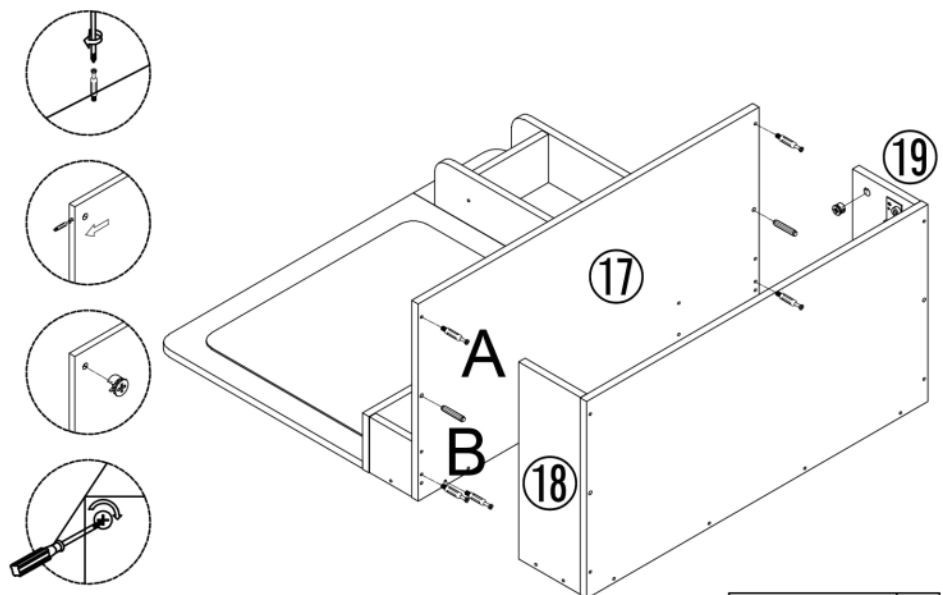

A*6


B*4

Panel Required	Qty
⑰	1
⑱	1
⑲	1

STEP 19

Assemble Door of Side Cabinet-Left Side Cabinet

- Screw 8pcs Short Tapping Screw E to assemble 2pcs of Hinge K to connect Panel ① and Panel ⑥.
- Screw Handle I to Panel ⑥.

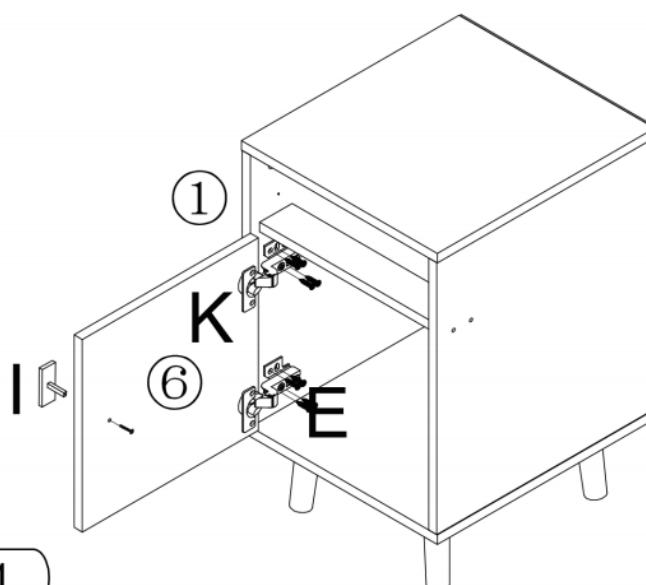

I*1

E*8


K*2

Panel Required	Qty
①	1
⑥	1

STEP 20

Assemble Table Legs-Left Side Cabinet

- Insert 10pcs Short Tapping Screw E through 2pcs Mounting Plate F to assemble 2pcs Table Legs H to Panel ②⑥ (installed in STEP 18).
- Place 5pcs Small Sticker J to cover Left Side screw

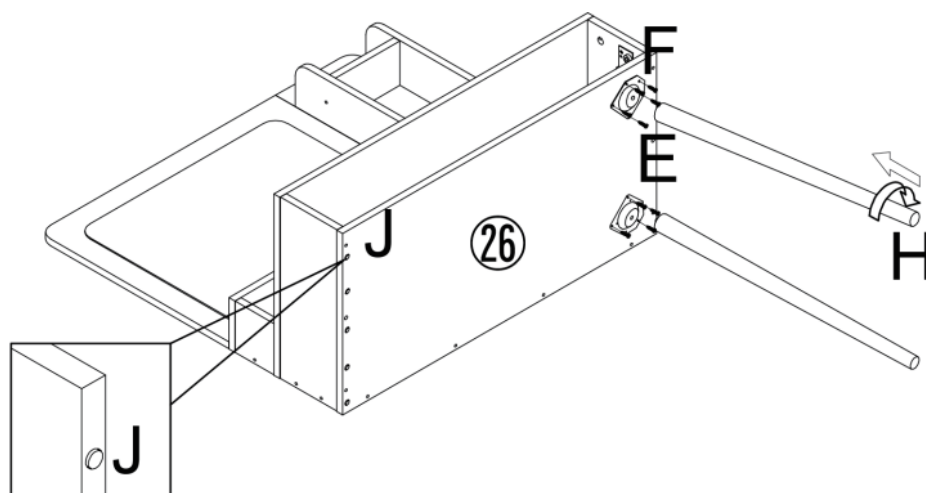

H*2

J*5


E*10

F*2

Panel Required	Qty
②⑥	1

STEP 21


Get dressing table with
left side cabinet.

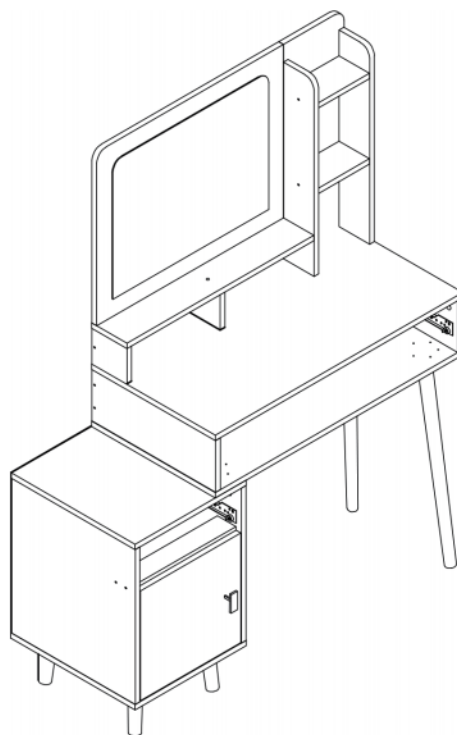

STEP 22

Assemble Door of Side Cabinet--Right Side Cabinet

- Screw 8pcs Short Tapping Screw E to assemble 2pcs of Hinge K to connect Panel ② and Panel ⑥.
- Screw Handle I to Panel ⑥.

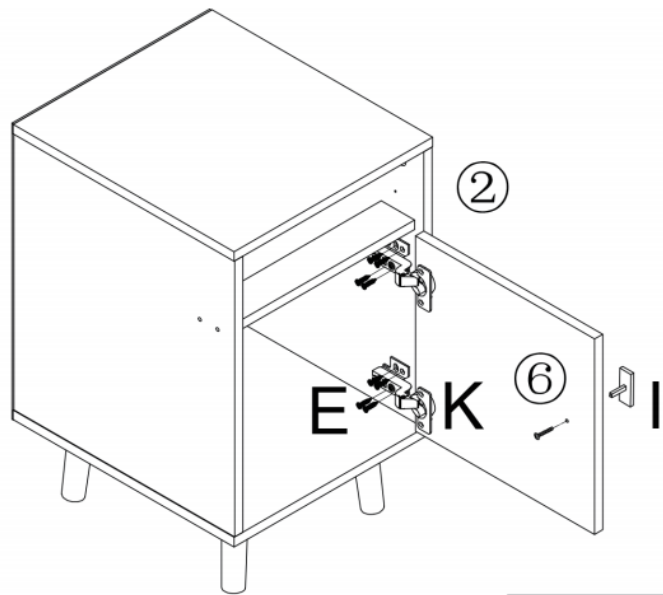

I*1

E*8


K*2

Panel Required	Qty
②	1
⑥	1

STEP 23

Assemble Table Legs-Right Side Cabinet

- Insert 10pcs Short Tapping Screw E through 2pcs Mounting Plate F to assemble 2pcs Table Legs H to Panel ②⑥ (installed in STEP 18).
- Place 5pcs Small Sticker J to cover Right Side screw holes.

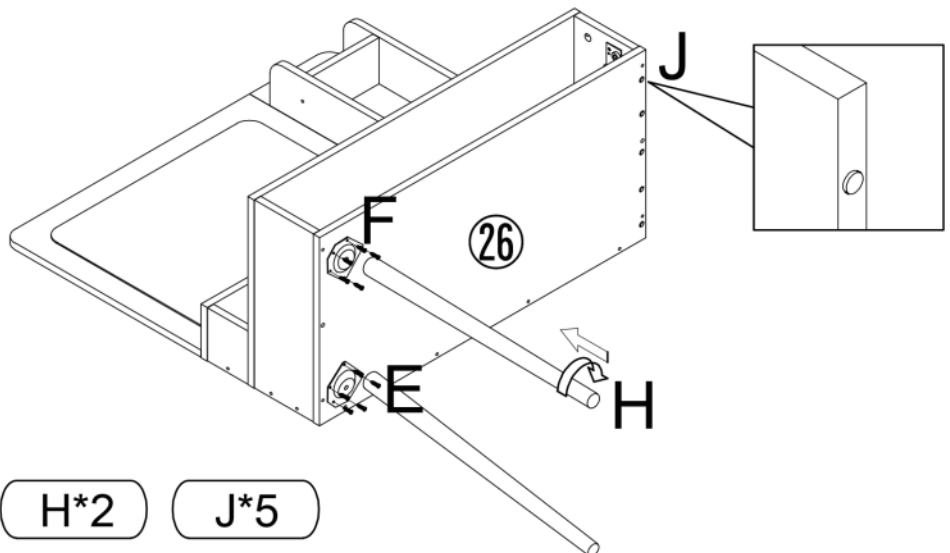

H*2

J*5


E*10

F*2

Panel Required	Qty
②⑥	1

STEP 24

Get dressing table with
right side cabinet.


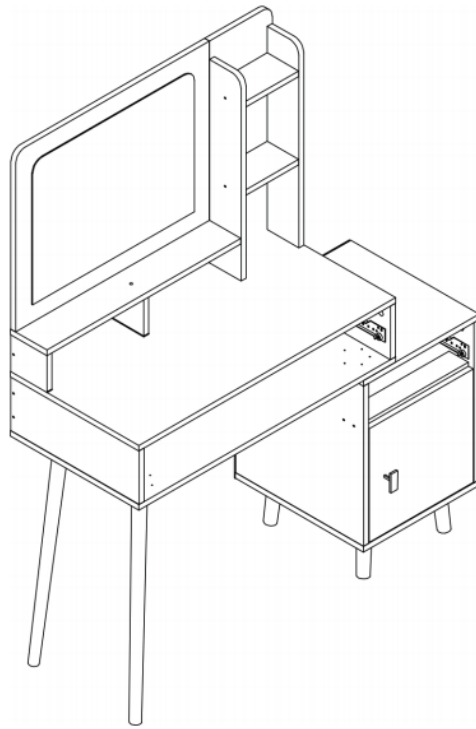


STEP 25

Hinge Adjustment

To adjust door up or down

- Loosen 2pcs of screws B1 and adjust door to fit better.
- Once door is aligned, re-tighten 2pcs of screws B1.

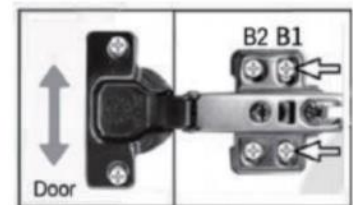
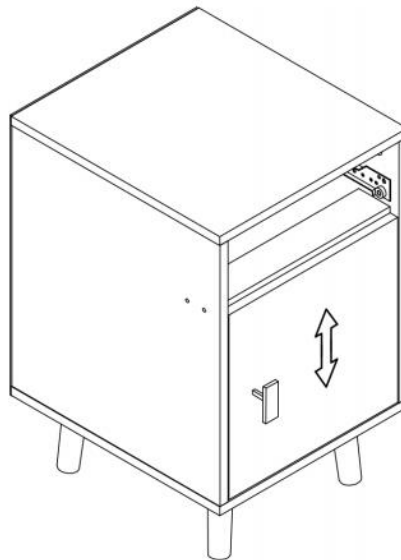


STEP 26

Hinge Adjustment

To adjust door in or out

- Loosen screw B2 and adjust door to fit better.
- Re-tighten screw B2.


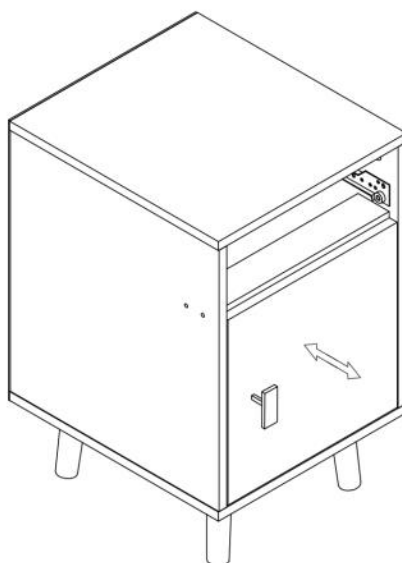


STEP 27

Hinge Adjustment

To adjust door left or right


- Loosen screw C and adjust door to fit better.
- Re-tighten screw C.

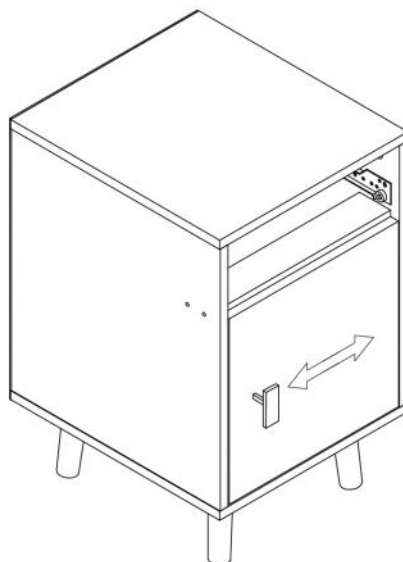

STEP 28

Assemble Back Panel of Side Cabinet

Screw 30pcs Nails M to Panel ⑦.

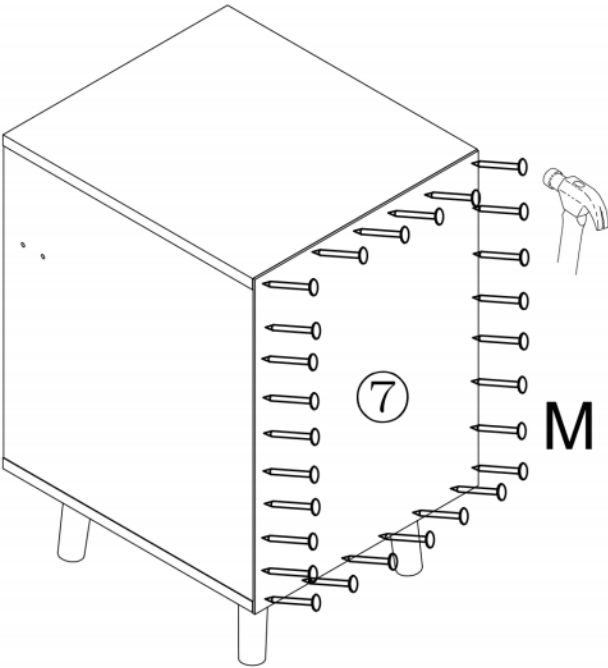



M*30

Panel Required	Qty
⑦	1

STEP 29

Assemble Big Drawer

- Insert 4pcs Hexagon Tapping Screw C to connect Panel (22), Panel (23) and Panel (24).
- Screw 2pcs Cambolt A to 2pcs of Panel (25) and tighten 2pcs Camlock A.
- Place 1pc Panel (26), follow the grooves and fit in, screw Handle I to Panel (27).
- Screw 6pcs Cambolt A to connect Panel (22), Panel (24) and Panel (27) and tighten 6pcs Camlock A.
- Insert 4pcs Short Tapping Screw E to Panel (22) and Panel (24) with 2pcs of Slide Runner D2.

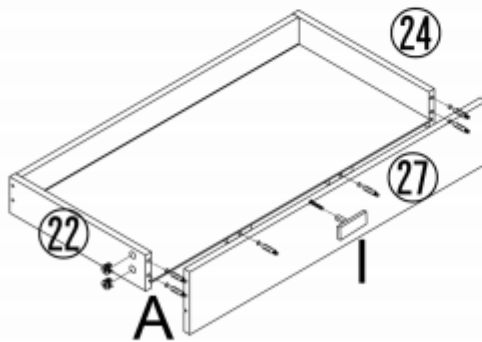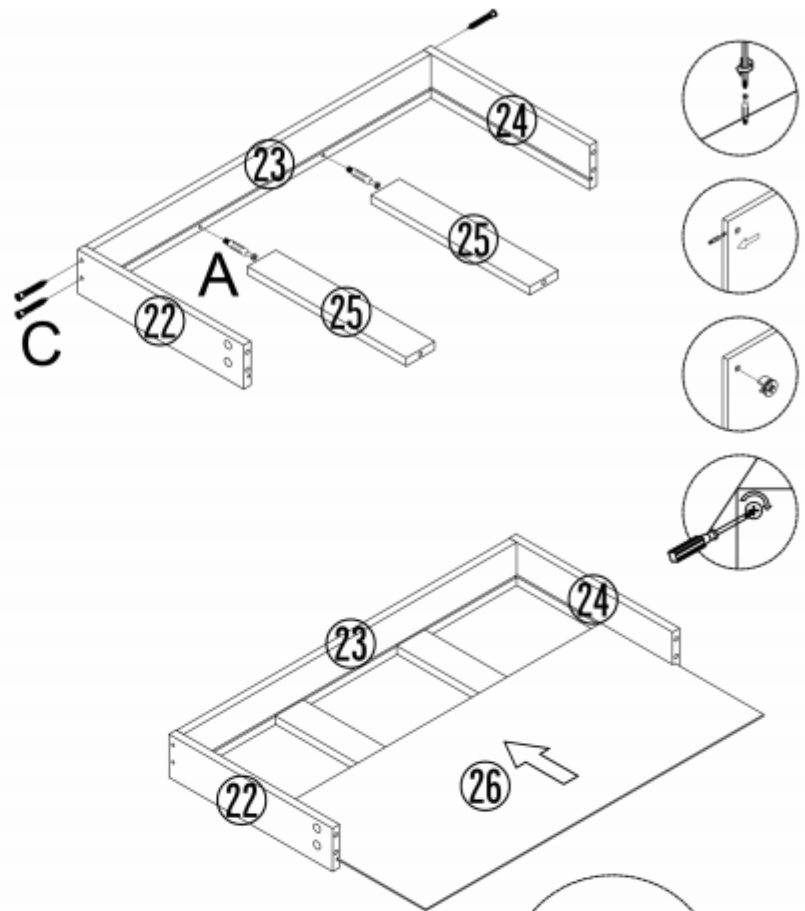


I*1

D2*2

A*8

E*4

C*4



E




D2

Panel Required	Qty
22	1
23	1
24	1
25	2
26	1
27	1

STEP 30

Assemble Big Drawer

- Insert 4pcs Hexagon Tapping Screw C to connect Panel(28), Panel(29)and Panel(30).
- Place 1pc Panel(30), follow the grooves and fit in, screw Handle I to Panel(32).
- Screw 4pcs Cambolt A to connect Panel(28), Panel(30) and Panel(32)and tighten 4pcs Camlock A.
- Insert 4pcs Short Tapping Screw E to Panel(28)and Panel(30)with 2pcs of Slide Runner D2.

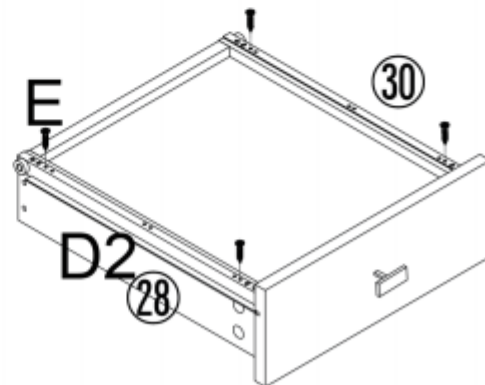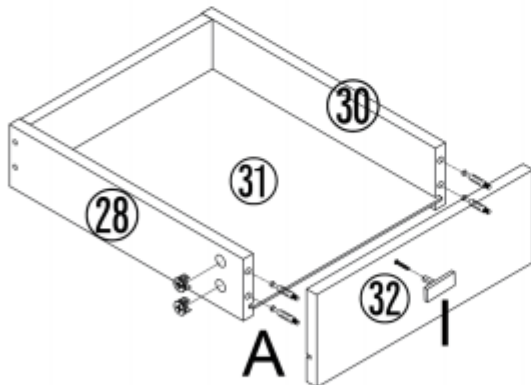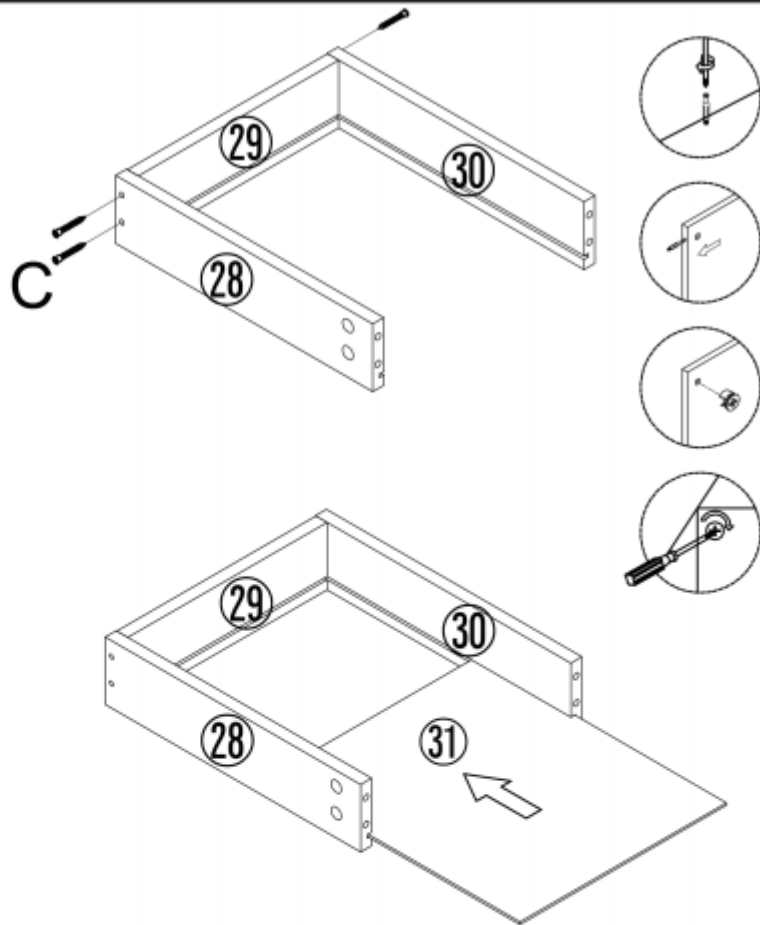

I*1

D2*2

E*4

A*4


C*4

Panel Required	Qty
28	1
29	1
30	1
31	1
32	1

STEP 31

Attach Big Drawer and Small Drawer


Fix the rail into the slot of the Drawer.

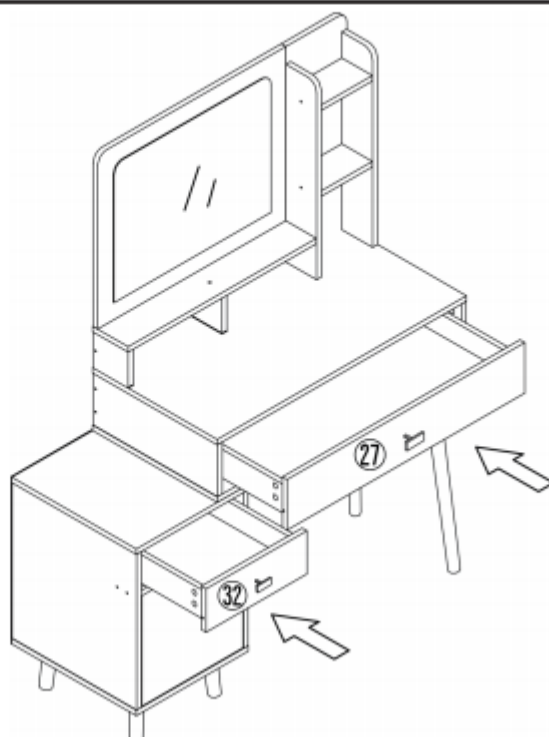

STEP 32

Attach LED Bulbs

- Measure the location of 10 bulbs and mark out.
- Adjust the wire length of each bulb.
- Stick 10 LED bulbs.
- Adjust the wire length to fit better.

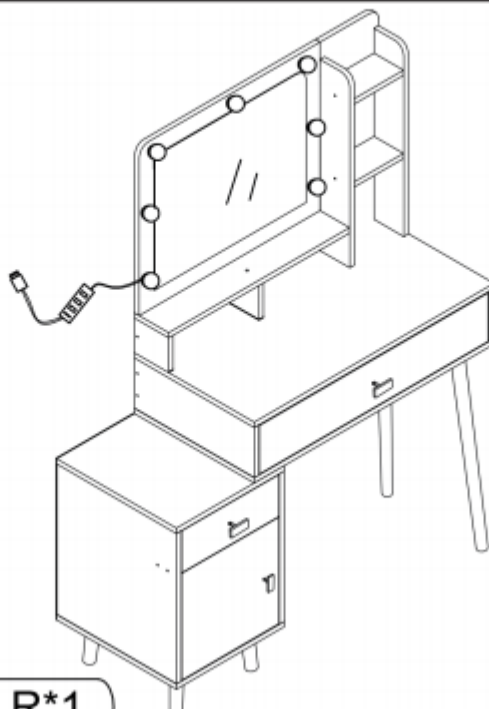

How to Install the Bulbs?



1. First measure the location to be installed, and mark it with Marker Pen



2. Adjust the LED light wire to a suitable distance, and put the LED light on the mirror to see if it is suitable



3. Stick the 3M tape on the LED bulb, and then stick the bulb on the mirror in turn





4. Finally adjust the bulb line to keep it neat

R*1

STEP 33

Anti-Tilt

- Insert Short Tapping Screws N3 into the cabinet by wall strap N1.
- Insert Long Tapping Screws N2 with Wall Plug N4 into the wall by wall strap N1 to prevent tilting.

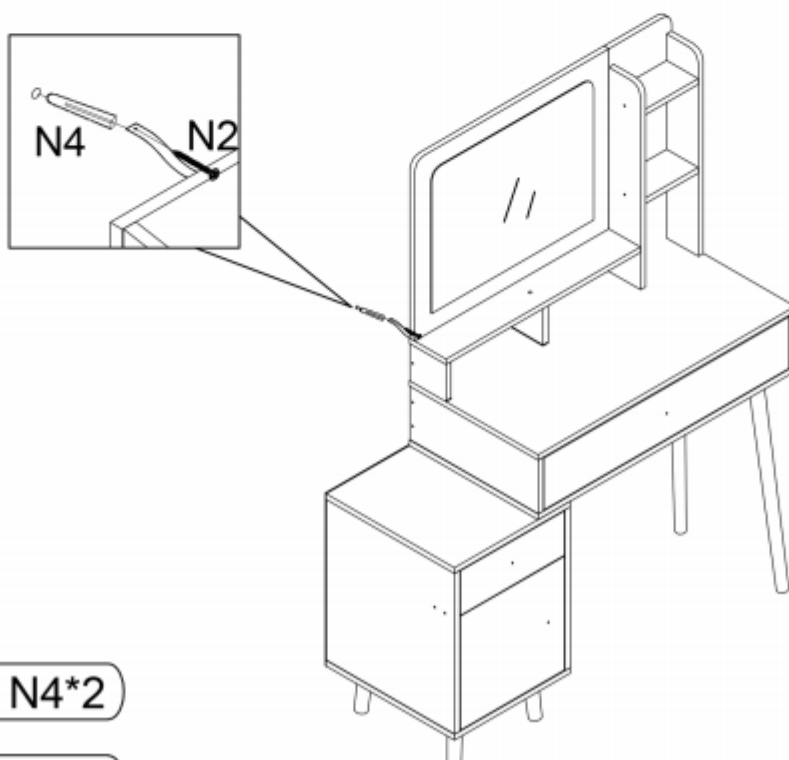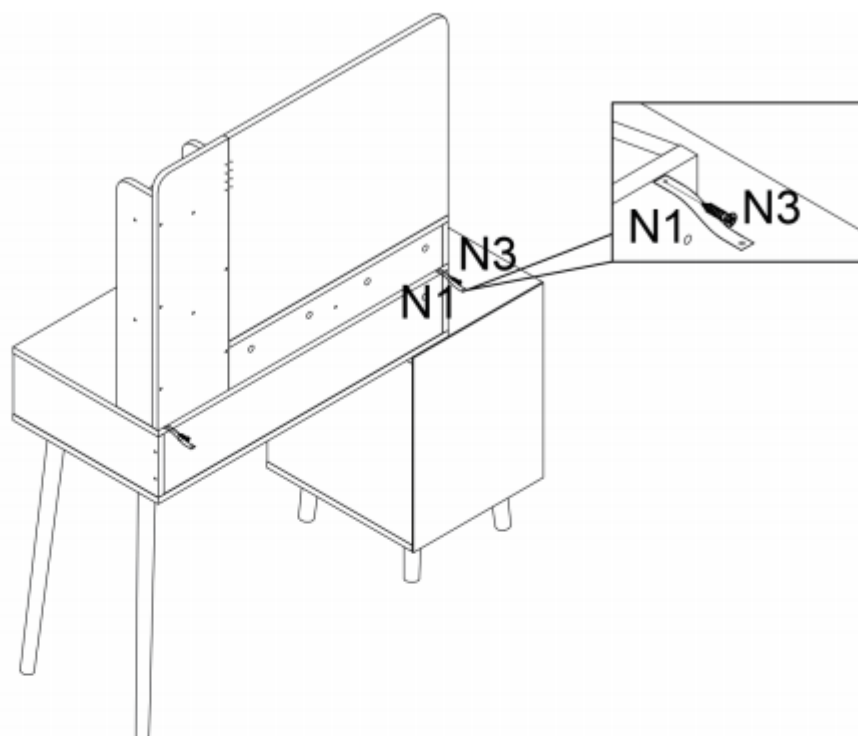

N3*2

N4*2

N1*2



N2*2

Panel Required	Qty
⑪	1

STEP 34

Assemble Dressing Stool

- Insert 4pcs Tapping Screw L to connect Panel (33) and Panel (34).
- Insert 20pcs Short Tapping Screw E through 4pcs Mounting Plate F to assemble 4pcs Stool Legs P to Panel (34).

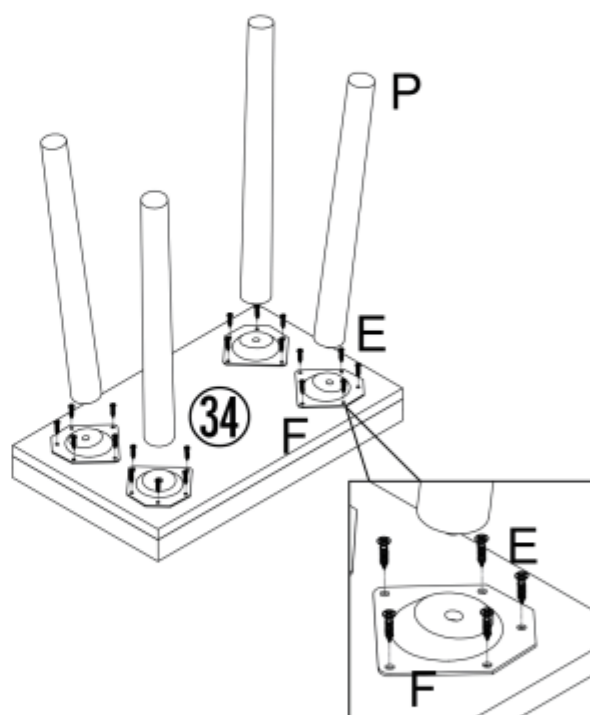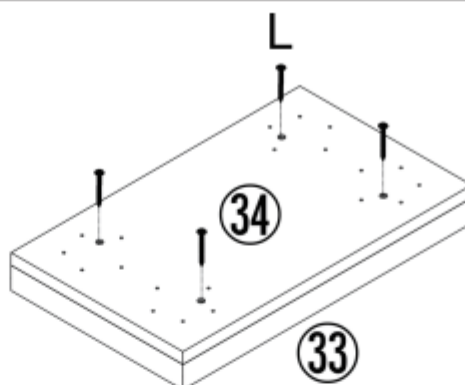

L*4

P*4


E*20

F*4

Panel Required	Qty
(33)	1
(34)	1

STEP 35

Get whole dressing table
with side cabinet.

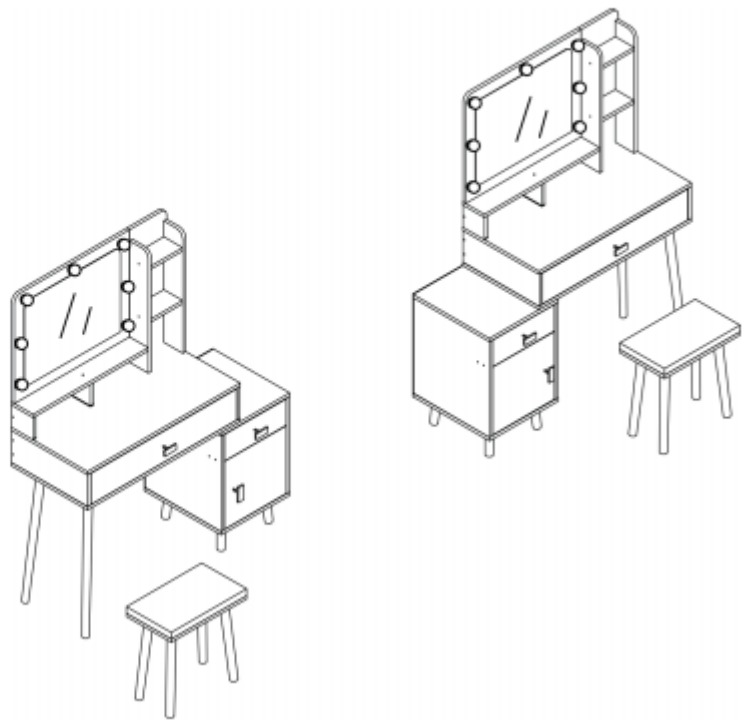

PROTECTIVE FILM

Please remove the protective film before using.





Assembly Completed

Your Dressing Table is now completely assembled

Periodically check to ensure that the components are in their proper position, free from damage

Also, make sure the connectors are tight and secure.

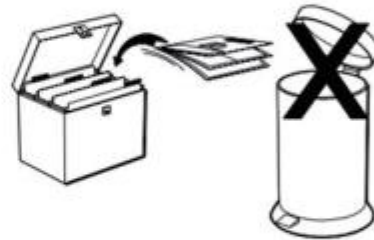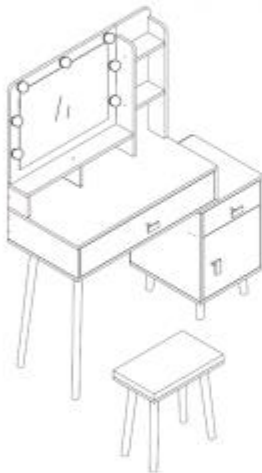

Keep instructions for future reference

WARNINGS

- ! This product should only be used on a firm and level floor.
- ! Keep small parts out of reach of children.
- ! Make sure the legs remain in contact with the floor.
- ! **DO NOT** use power tools to construct this product.
- ! **DO NOT** tighten screws until all parts are assembled or as advised in this guide.
- ! **DO NOT** over-tighten screws or bolts.
- ! **DO NOT** use this product if parts are missing, damaged or worn.
- ! **DO NOT** sit or stand on the product.